



OG8401/P - Lincat Opus 800 Propane Gas Counter-top Chargrill - W 600 mm - 12.6 kW

Embrace the unique power and versatility of the Opus 800 Three-Zone Gas Chargrill, which provides three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks.

- ✓ Three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks. Individual zones can be turned off during quiet periods.
- ✓ Highly powerful infra-red burners respond quicker and heat faster than standard burners allowing you to increase your output and achieve energy savings
- ✓ Heavy-duty cast iron branding grids with reversible design, for uninterrupted cooking and self cleaning at maximum power
- ✓ Flame failure protection
- ✓ Heavy duty radiant caps protect burners

Specifications

Summary		Power and Performance	
Brand	Lincat	BTU per Hour	42,991
Range	Opus 800	Total Power kW	12.6
Power Type	Gas	Cooking Area (Width x Depth) mm	500 x 620
Gas Type	Propane Gas	Temperature Control	Mechanical
Unit Type	Counter-top		
Available in UK Only	No		
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105102823		

Key Specifications		Capacity	
Number of Heat Zones	3	Product Output per Hour	78 x 225g [8oz] steaks [chilled]


Weights and Dimensions		Supply Connections	
Unit Height (External) mm	653	Requires Installation	Yes
Unit Width (External) mm	600	Requires Electrical Supply	No
Unit Depth (External) mm	806	Gas Connection BSP	1/2"
Net Weight Kg	80.5	Gas Consumption at full rate Propane m³ per Hour	0.9
		Gas Pressure Propane mbar	37
		Total heat input at full rate Propane kW	12.6
		Total heat input at full rate Propane BTU per hour	42,911

Shipping	
Packed Weight Kg	88.55
Packed Height cm	79
Packed Width cm	70
Packed Depth cm	85

Available Accessories

CH01	Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU
CH02	Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU
OA8950	Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 600 mm
OA8950/C	Lincat Opus 800 Free-standing Floor Stand with Castors - for units W 600 mm
RC03M	RADIANT COVER - OPUS 800 - UNDER DEVELOPMENT

Technical Picture

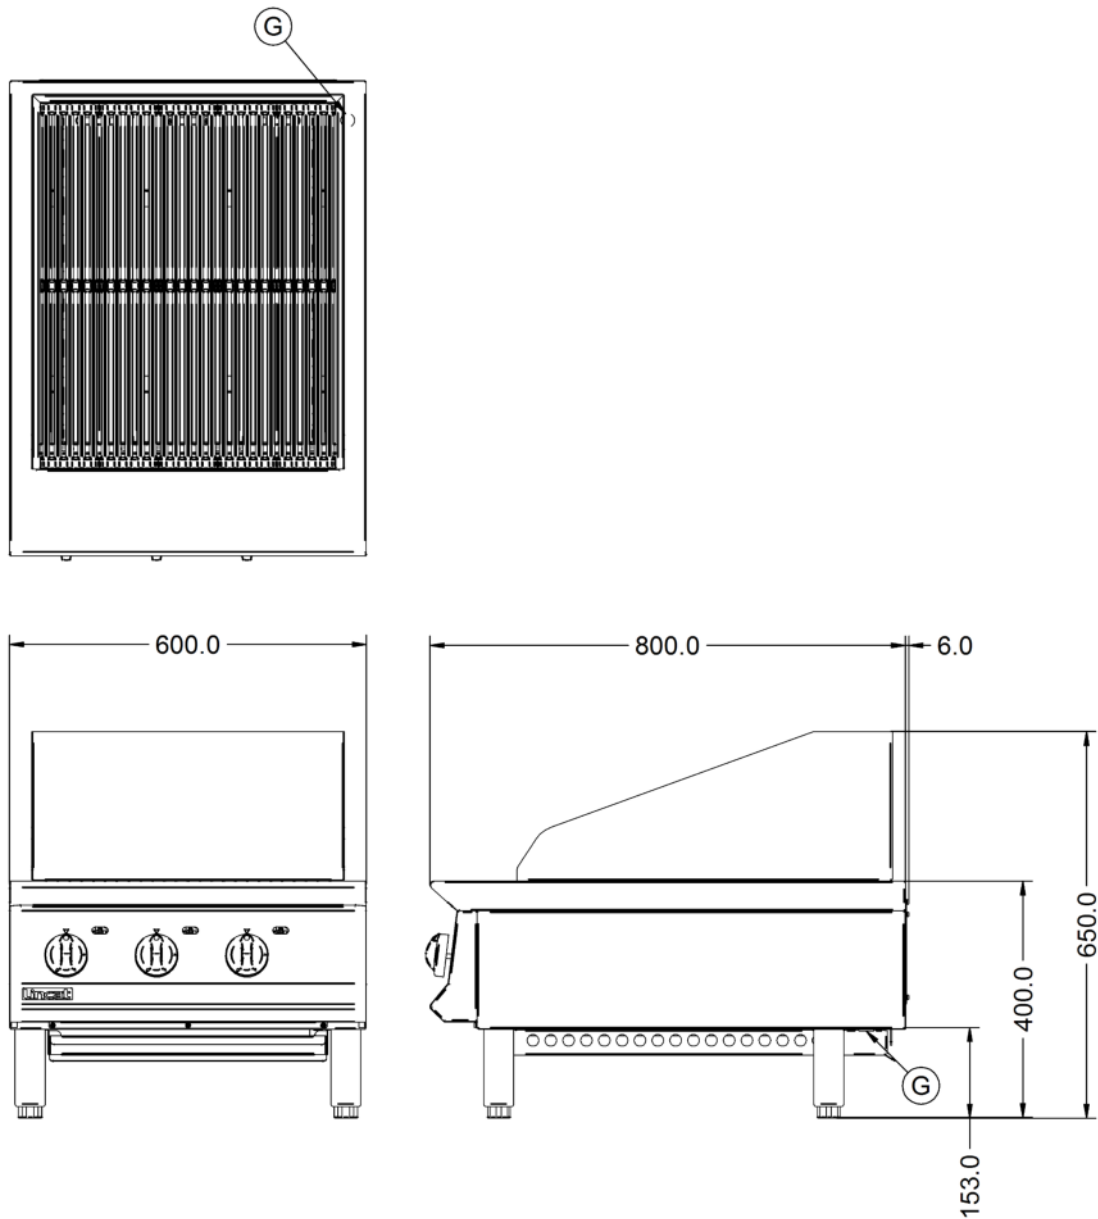



Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm