





F54/726 - IMC Vulture 1204X Floor-mounted Food Waste Disposer - 3 Phase [5 wire][air break] - W 514 mm - 2.2 kW Reliable, efficient, safe and easy to operate, the 1204X Waste Disposer allows operators to quickly and effectively remove waste, to create a safer and cleaner kitchen.

- Fast and efficient disposal of up to 700kg of food waste per hour.
- Handles up to 1450 covers per sitting ideal for large kitchens.
- For tough waste (red meat bones, cauliflower stalks and fish skins).
- Free-standing design, but can be welded into tabling with E30/096 hopper rim.
- Manually reversible motor to extend operational life.
- Low-load cut-outs ensure energy and water efficiency.
- Fitted with a with class A airbreak kit, recommended for when connecting to a mains water supply.
- Suitable for large kitchens with three-phase, five-wire power supply.

Summary Power and Performance Power and Performance Power Awange Vulture Power KW Power KY Pow	Specifications			
Range Vulture HP 3 Series 04X Series 1P Rating 1P55 Power Type Electric 1Poor-mounted or welded into tabling 1P (with optiona 2 Years Parts and Labour Warranty 2 Years Parts and Labour Warranty 2 Poor Warranty 2 Poor Warranty 2 Poor Warranty 2 Poor Warranty 3 Poor Warranty 3 Poor Warranty 4 Poor Warranty 4 Poor Warranty 4 Poor Warranty 4 Poor Warranty 5 Poor Warranty 6 Poor Warranty 6 Poor Warranty 6 Poor Warranty 7 Poor Warranty 7 Poor Warranty 8 Poor Warranty 8 Poor Warranty 9 Poor Warra	Summary		Power and Performance	
Export Warranty Mounting GTIN Key Specifications Capacity Operator Safety Airbreak Yes Covers Per Sitting Capacity Kg per Hour Tough waste Covers Per Sitting Capacity Kg per Hour Tough	Range Series Power Type Unit Type	Vulture 04X Series Electric Floor-mounted or welded into tabling [with optiona	НР	3
Operator Safety Airbreak Yes Covers Per Sitting Capacity Kg per Hour Tough waste Covers Per Sitting Capacity Kg per Hour Tough waste To	Export Warranty Mounting	Contact your local dealer Floor-mounted		
Airbreak Yes Covers Per Sitting Capacity Kg per Hour 700 Weights and Dimensions Supply Connections Unit Height (External) mm 1014 Requires Installation Yes Unit Width (External) mm 514 Requires Electrical Supply Yes Unit Depth (External) mm 740 UK 3 Pin Plug No Net Weight Kg 74 Requires Hardwiring Yes Electrical Supply Rating Watts 2200 Three Phase Amps 5.1 Three Phase Voltage 400	Key Specifications		Capacity	
Unit Height (External) mm 1014 Requires Installation Yes Unit Width (External) mm 514 Requires Electrical Supply Yes Unit Depth (External) mm 740 UK 3 Pin Plug No Net Weight Kg 74 Requires Hardwiring Electrical Supply Rating Watts 2200 Three Phase Amps 5.1 Three Phase Voltage 400			Covers Per Sitting	1450
Unit Width (External) mm514Requires Electrical SupplyYesUnit Depth (External) mm740UK 3 Pin PlugNoNet Weight Kg74Requires HardwiringYesElectrical Supply Rating Watts2200Three Phase Amps5.1Three Phase Voltage400	Weights and Dimensions		Supply Connections	
Water Connection Pressure Bar 0.18	Unit Width (External) mm Unit Depth (External) mm	514 740	Requires Electrical Supply UK 3 Pin Plug Requires Hardwiring Electrical Supply Rating Watts Three Phase Amps Three Phase Voltage Water Supplied From Water Connection Pressure Bar	Yes No Yes 2200 5.1 400 Mains or storage cistern 0.18 2* BSP threaded flange, connected to





Shipping

 Packed Weight Kg
 81.4

 Packed Height cm
 105

 Packed Width cm
 79

 Packed Depth cm
 54

Available Options

MAG CUTLERY SAVER

VS279 1204/1204X/1604/1604X MAGNETIC CUTLERY SAVER

REMOTE CONTROL BOX

S54/026 1204X REMOTE CONTROL BOX


Available Accessories


E30/096 Hopper Rim for 1204/1204X/1604/1604X Food Waste Disposer


Technical Picture









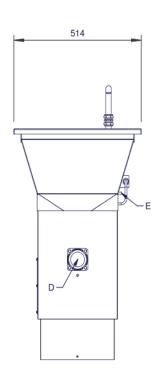



Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm